


- This product must be installed by a professional installer. More than one person needs to be involved in the installation of this product.
- This product is designed to be mounted on a flat concrete surface. Before installation please verify that the supporting surface can bear the combined weight of the solution and hardware.
- Do not to overtighten the fixings.


CAUTION


- Do not scratch the surface of the enclosure during installation, as it can lead to corrosion over time.
- The maximum weight limit for hardware (screen, accessories etc.) for this solution is 55 kg. Do not exceed the stated weight limit.
- It is the responsibility of the installer to use the appropriate chemical anchors for the specific installation location. Please follow the fixing suppliers recommendations for installation. The anchors should as a minimum be thread size M14 with steel grade 8.8 or better (min. yield strength of 76.4kN).
- This product is intended for outdoor use. Installation is not recommended to take place in rough weather conditions (Strong wind, heavy rain or snow).
- This solution is purely designed for outdoor certified hardware and accessories. Always follow the installation guide from the hardware manufacturer for correct installation.
- The enclosure includes air ventilation holes on the rear of the unit. These need to remain open at all times to ensure correct operations of the screen.
- Please don't power the hardware, until the entire solution is fully assembled.
- If these installation instructions are not followed precisely, it could lead to product failure and potential personal injury.
- Ergonomic Solutions cannot be held responsible for any failure or injury, if the installation instructions are not followed correctly.
- Ergonomic Solutions cannot be held responsible for any failure or injury, if any modifications have been made to the product by the customer.

MAINTENANCE

- Any scratches to the surface of the product should be repaired immediately to avoid any corrosion.
- It is the responsibility of the customer to periodically check the installation and ensure it is clean, all air ventilation holes are free and all fixings are tightened correctly.
- Do not use pressure hoses or high-pressure water jets, garden horses and sprinklers directly on the enclosure.

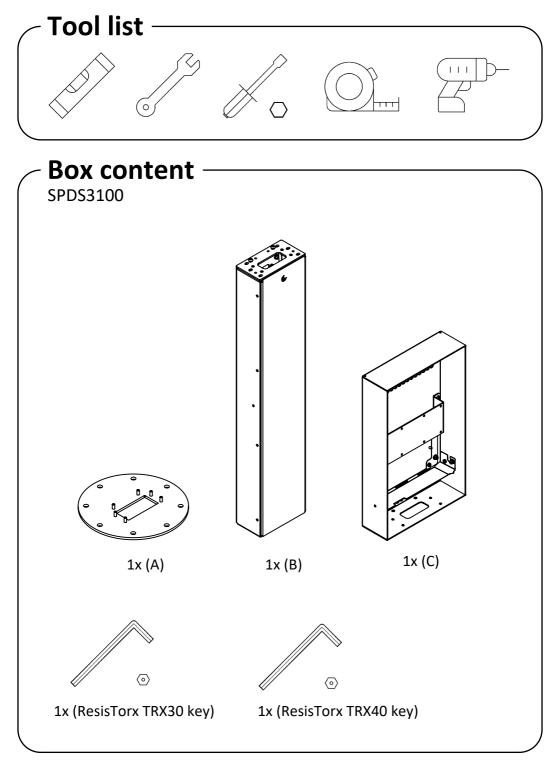


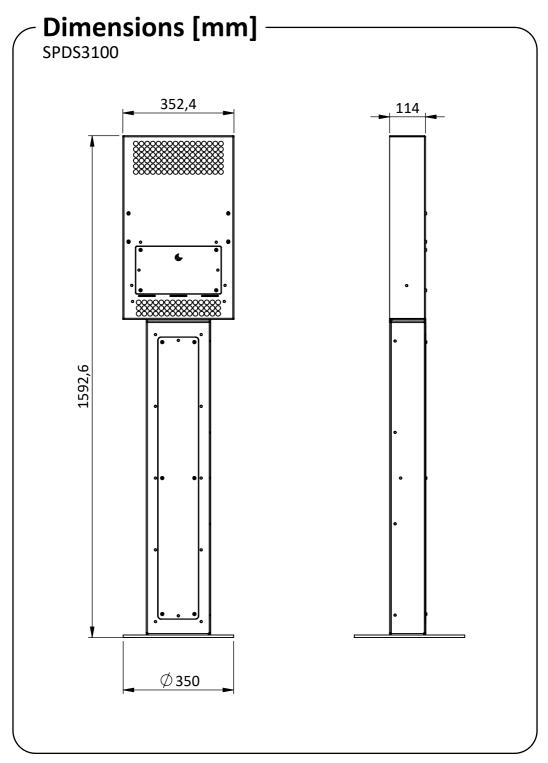


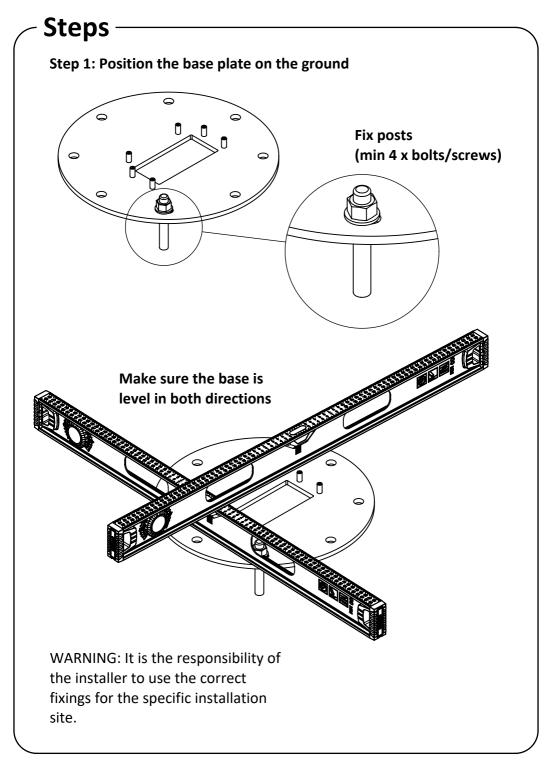



Steps


Step 2: Remove the back lid

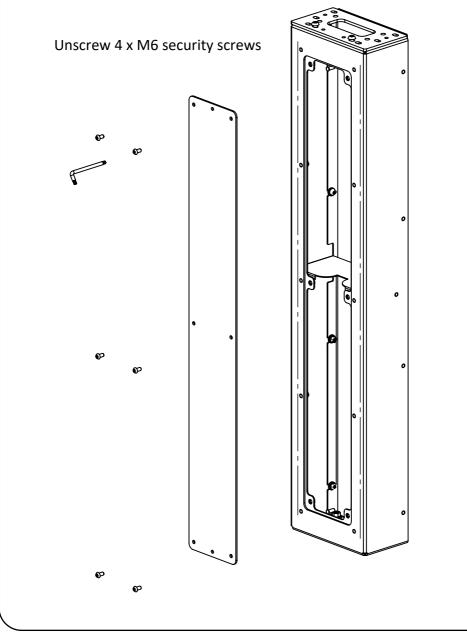

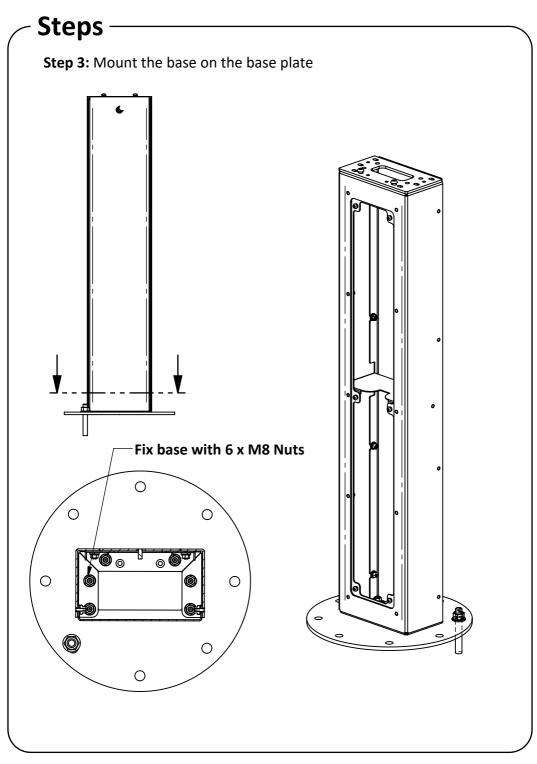

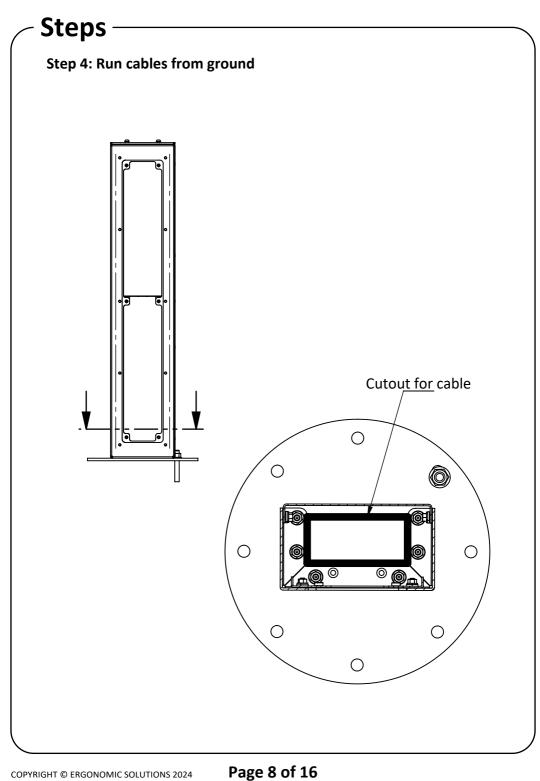

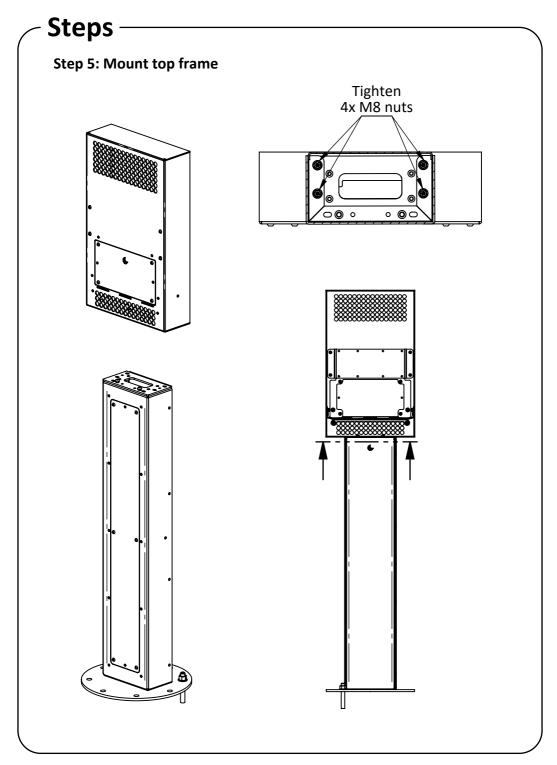


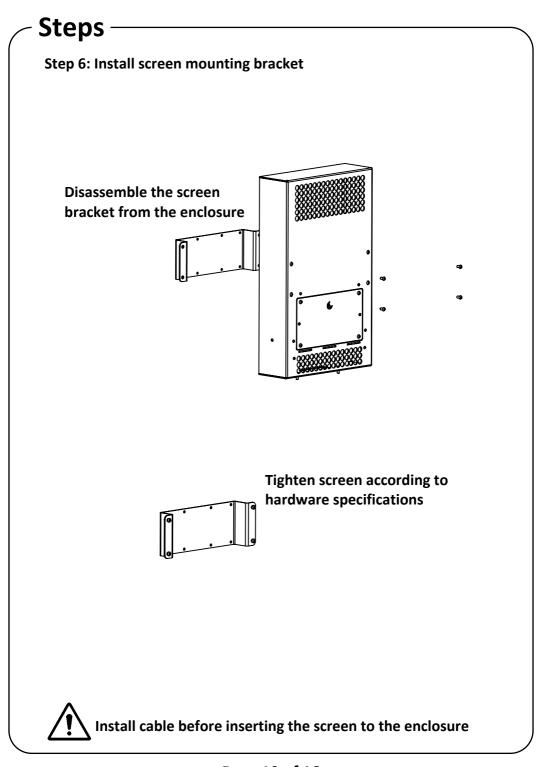

- Steps -

Step 7: Install hardware

Position screen inside cabinet

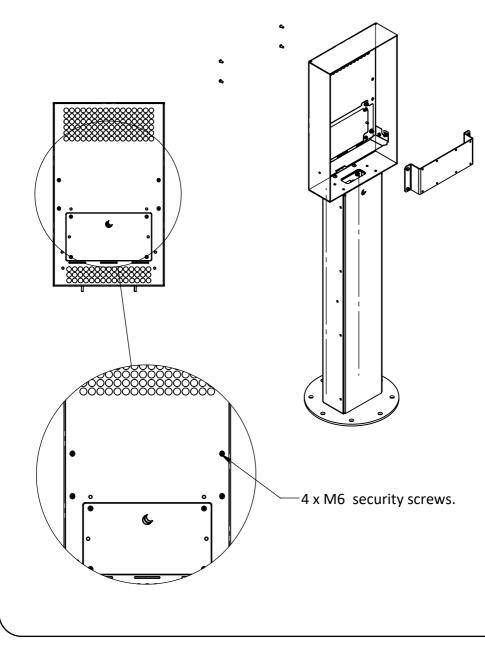



Page 16 of 16